


NUCLEI "C" A BASSO PROFILO

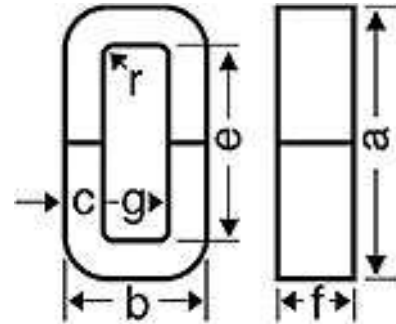

Per applicazioni con particolari problemi tecnici, **TECNOCORES S.R.L.** realizza nuclei "C" su disegno fornito o concordato con il Cliente.

Serie UI	f + 0,3 mm	g + min. mm	e min. mm	c + 0,5 mm	b max. mm	a max. mm	r max mm	Im cm	Sr mm cm ²	weight min. kg
UI 30/7	7,0	10,0	30,0	9,5	30,0	50,0	1,5	10,98	0,63	0,054
UI 30/10	10,0	10,0	30,0	9,5	30,0	50,0	1,5	10,98	0,90	0,077
UI 30/13	13,0	10,0	30,0	9,5	30,0	50,0	1,5	10,98	1,17	0,100
UI 30/16	16,0	10,0	30,0	9,5	30,0	50,0	1,5	10,98	1,44	0,123
UI 30/20	20,0	10,0	30,0	9,5	30,0	50,0	1,5	10,98	1,80	0,154
UI 39/8	8,0	13,0	40,0	12,2	38,4	65,4	1,5	14,43	0,93	0,104
UI 39/10	10,0	13,0	40,0	12,2	38,4	65,4	1,5	14,43	1,16	0,130
UI 39/13	13,0	13,0	40,0	12,2	38,4	65,4	1,5	14,43	1,51	0,169
UI 39/16	16,0	13,0	40,0	12,2	38,4	65,4	1,5	14,43	1,85	0,208
UI 39/20	20,0	13,0	40,0	12,2	38,4	65,4	1,5	14,43	2,32	0,260
UI 48/10	10,0	16,0	48,0	16,0	49,0	81,0	1,5	17,83	1,52	0,211
UI 48/13	13,0	16,0	48,0	16,0	49,0	81,0	1,5	17,83	1,98	0,274
UI 48/16	16,0	16,0	48,0	16,0	49,0	81,0	1,5	17,83	2,43	0,337
UI 48/20	20,0	16,0	48,0	16,0	49,0	81,0	1,5	17,83	3,04	0,422
UI 48/25	25,0	16,0	48,0	16,0	49,0	81,0	1,5	17,83	3,80	0,527
UI 60/20	20,0	20,0	60,0	20,0	61,0	101,0	1,5	22,28	3,80	0,659
UI 60/30	30,0	20,0	60,0	20,0	61,0	101,0	1,5	22,28	5,70	0,988
UI 75/26	26,0	25,0	75,0	25,0	75,0	126,0	1,5	27,85	6,17	1,338
UI 75/41	41,0	25,0	75,0	25,0	75,0	126,0	1,5	27,85	9,73	2,110

$$Sr = S_n \times 0,95$$

0,95 = coeff. di riempimento